



## **DBS30.2 FIRMWARE UPGRADE PROCEDURE (NETWORK UPDATE):**

1. Turn on the BD player. Wait until “NO DISC” is displayed on the front display.
2. Make sure to connect the player to a monitor to display video. Also, check Ethernet cable connection to internet.
3. Press “Setup” button on the remote control. You will see following screen on the monitor.



4. Use [▲/▼] button on remote control to select  and then press “Enter” button. You will see following screen.



5. Use [▲/▼] to select : Others and press “Enter”. You will see following.



6. Scroll down by using [▲/▼] to select “Software Update”.




7. Press “Enter” button. Next, use [▲/▼] to select “Network update”. You will see following screen.



8. Press “Enter” button and use [▲/▼] to select “Yes”.




9. Press “Enter” button and use [▲/▼] to select “Yes”.

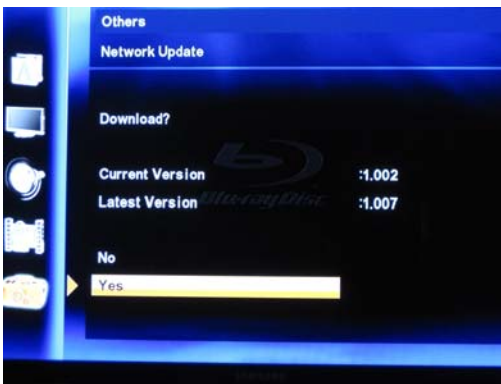

10. Press “Enter” button. You will see following:



11. After a few minutes, you will see following screen.

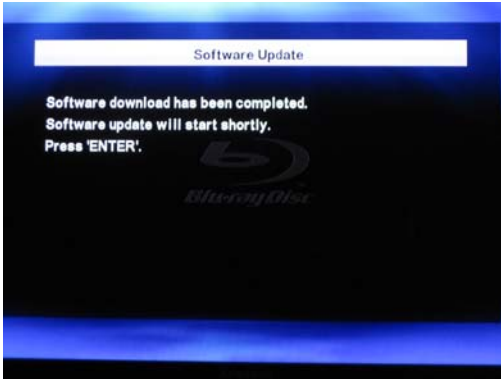

12. Press "Enter" button. You will see following screen.



13. After a few minutes, you will see following screen.



14. During the above upgrade you will see following on the front display of the BD player. The numbers will change and when it reaches **100/100**, upgrade process will be complete.



15. Do not interrupt updating process. The unit will turn off after completion of the upgrade process and then turn back on again and will open the disc tray. The whole process may take around 10 to 15 minutes.